



ELECTRIC POWERTRAIN SOLUTIONS

SMAC SERIE
TECHNICAL DATA SHEET
3-PHASE SYNCHRONOUS MOTOR

Code	51J13207516CT080400		
Rev.	00		
Date	23/03/2021		
Page	1	di	2

Motor Rated Power			3000W	
--------------------------	--	--	--------------	--


Inverter Power Supply			24Vdc	
------------------------------	--	--	--------------	--

Description	Symbol	Unit		
Duty	-	-	S2-60min	
Nominal Speed	n_n	rpm	3000	
Frequency (N° poles)	$f (2p)$	Hz	200.0 (8)	
Costant Voltage	K_e	Vrms/Krpm	4.5	
Costant Torque	K_t	Nm/Arms	0.07	
Instant Torque	T_i	Nm	41.0	
Instant Current	I_i	Arms	660.0	
Peak Torque	T_p	Nm	19.5	
Peak Current	I_p	Arms	260.0	
Rated Torque	T_r	Nm	9.5	
Rated Current	I_r	Arms	130.0	
Rotor Inertia	J_r	kg x m ²	0.004	
Ambient Temperature	θ_a	°C	-15 ÷ +40	
Protection Degree	IP		IP 54	up to IP67
Insulation Class	-	-	F	
Thermal protection	-	-	KTY 84-130	
Cooling system			Air	


PRELIMINARY

Speed-Torque & Speed Power Motor Curves (*)

SMAC 132-075

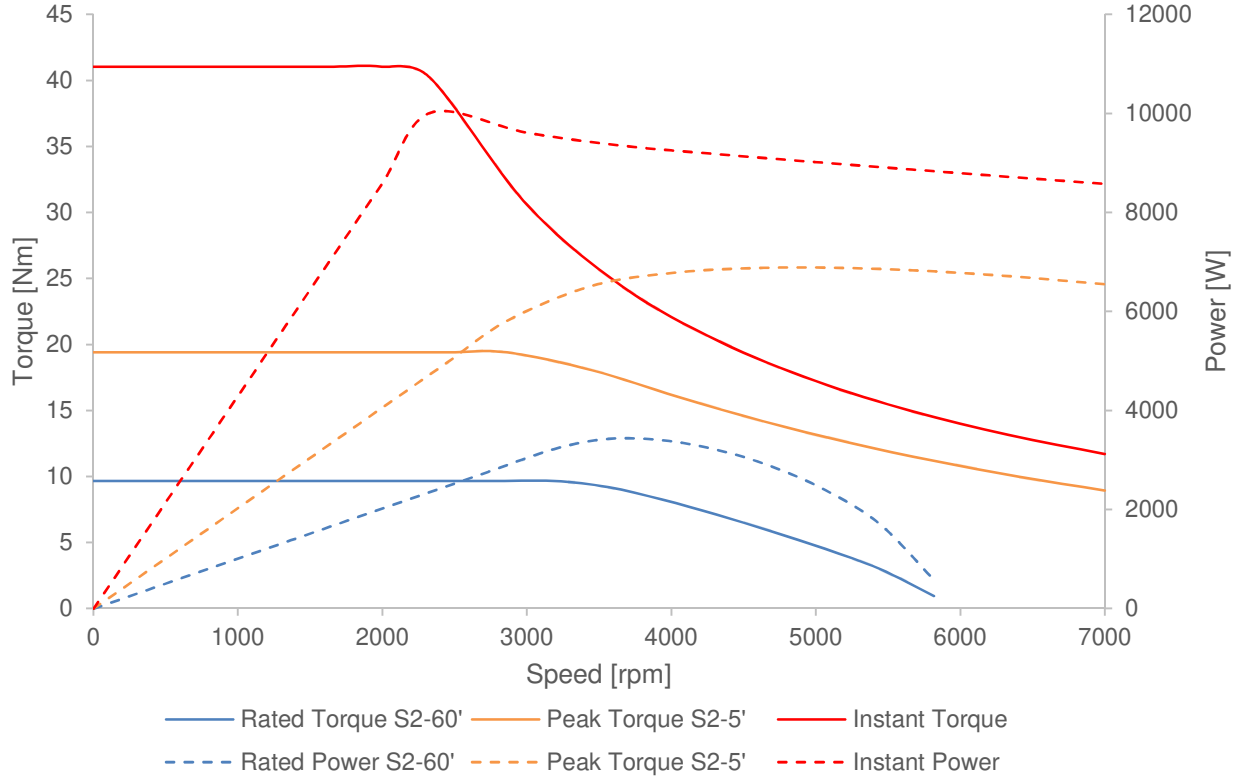

Efficiency Map % (*)

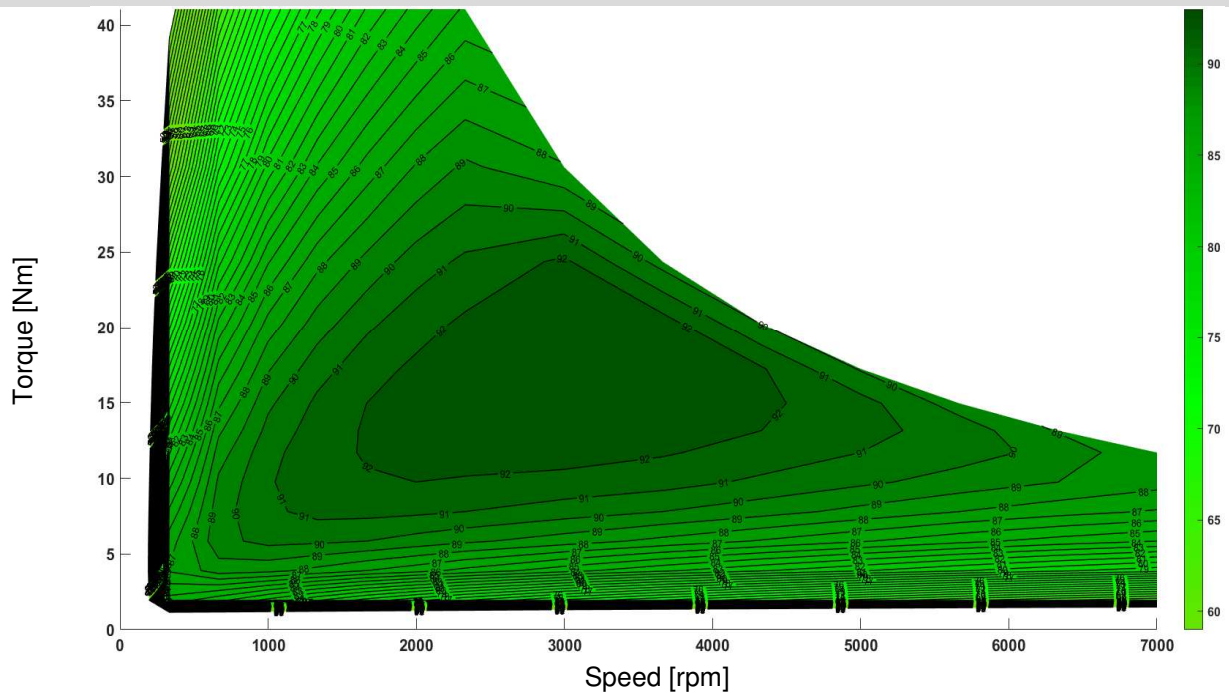

* MTPA Field Weakening strategy control & Optimized Advance Angle