



ELECTRIC POWERTRAIN SOLUTIONS

SMAC SERIE
TECHNICAL DATA SHEET
3-PHASE SYNCHRONOUS MOTOR

Code	51J20015747PS0804P0		
Rev.	00		
Date	06/05/2021		
Page	1	di	2

Motor Rated Power			20000W	
--------------------------	--	--	---------------	--


Inverter Power Supply			400Vdc	
------------------------------	--	--	---------------	--

Description	Symbol	Unit		
Duty	-	-	S1	
Nominal Speed	n_n	rpm	2500	
Frequency (N° poles)	$f (2p)$	Hz	166.6 (8)	
Costant Voltage	K_e	Vrms/Krpm	87.0	
Costant Torque	K_t	Nm/Arms	1.4	
Instant Torque	T_i	Nm	190.0	
Instant Current	I_i	Arms	155.0	
Rated Torque S1.	T_r	Nm	80.0	
Rated Current S1	I_r	Arms	57.0	
Rotor Inertia	J_r	kg x m ²	0.022	
Ambient Temperature	θ_a	°C	-15 ÷ +40	
Protection Degree	IP		IP67	
Insulation Class	-	-	F	
Thermal protection	-	-	PTY 84-130	
Cooling system			Liquid	


PRELIMINARY

Speed-Torque & Speed Power Motor Curves (*)

SMAC 200-157

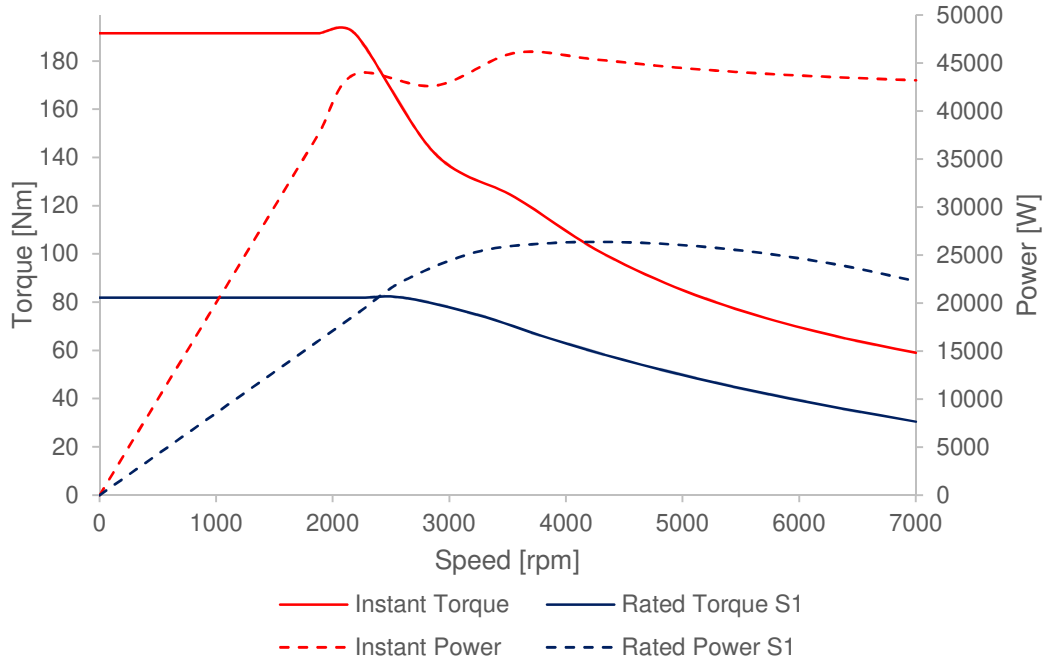

Efficiency Map % (*)

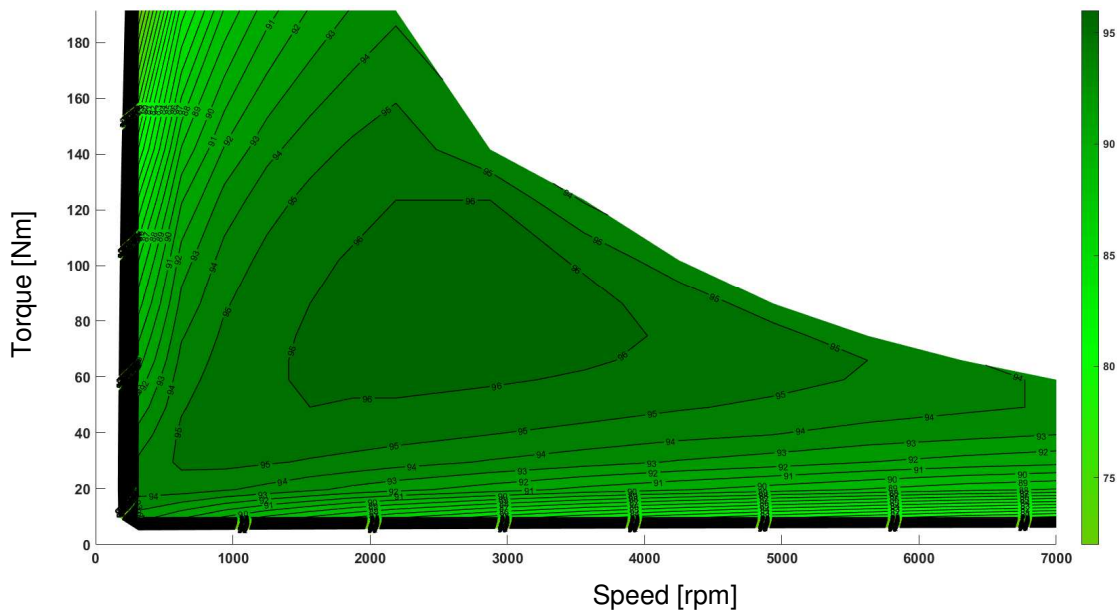

* MTPA = MTPV Field Weakening strategy control & Optimized Advance Angle