


Motor Rated Power			10000W	
--------------------------	--	--	---------------	--

Inverter Power Supply			600Vdc	
------------------------------	--	--	---------------	--

Description	Symbol	Unit		
<i>Duty</i>	-	-	S2-60min	
<i>Nominal Speed</i>	n_n	<i>rpm</i>	3000	
<i>Frequency (N° poles)</i>	$f (2p)$	<i>Hz</i>	200 (8)	
<i>Constant Voltage</i>	K_e	<i>Vrms/Krpm</i>	110	
<i>Constant Torque</i>	K_t	<i>Nm/Arms</i>	1.8	
<i>Instant Torque</i>	T_{inst}	<i>Nm</i>	72.0	
<i>Instant Current</i>	I_{inst}	<i>Arms</i>	51	
<i>Peak Torque S2-5min.</i>	T_{peak}	<i>Nm</i>	55.0	
<i>Peak Current S2-5min.</i>	I_{peak}	<i>Arms</i>	34	
<i>Nominal Torque S2-60min.</i>	T_n	<i>Nm</i>	30.0	
<i>Nominal Current S2-60min.</i>	I_n	<i>Arms</i>	17	
<i>Rotor Inertia</i>	J_r	<i>kg x m²</i>	0.012	
<i>Ambient Temperature</i>	θ_a	<i>°C</i>	-15 ÷ +40	
<i>Protection Degree</i>	<i>IP</i>		IP 54	up to IP67
<i>Insulation Class</i>	-	-	F	
<i>Thermal protection</i>	-	-	KTY 84-130	
<i>Cooling system</i>			Air	

Speed-Torque & Speed Power Motor Curves

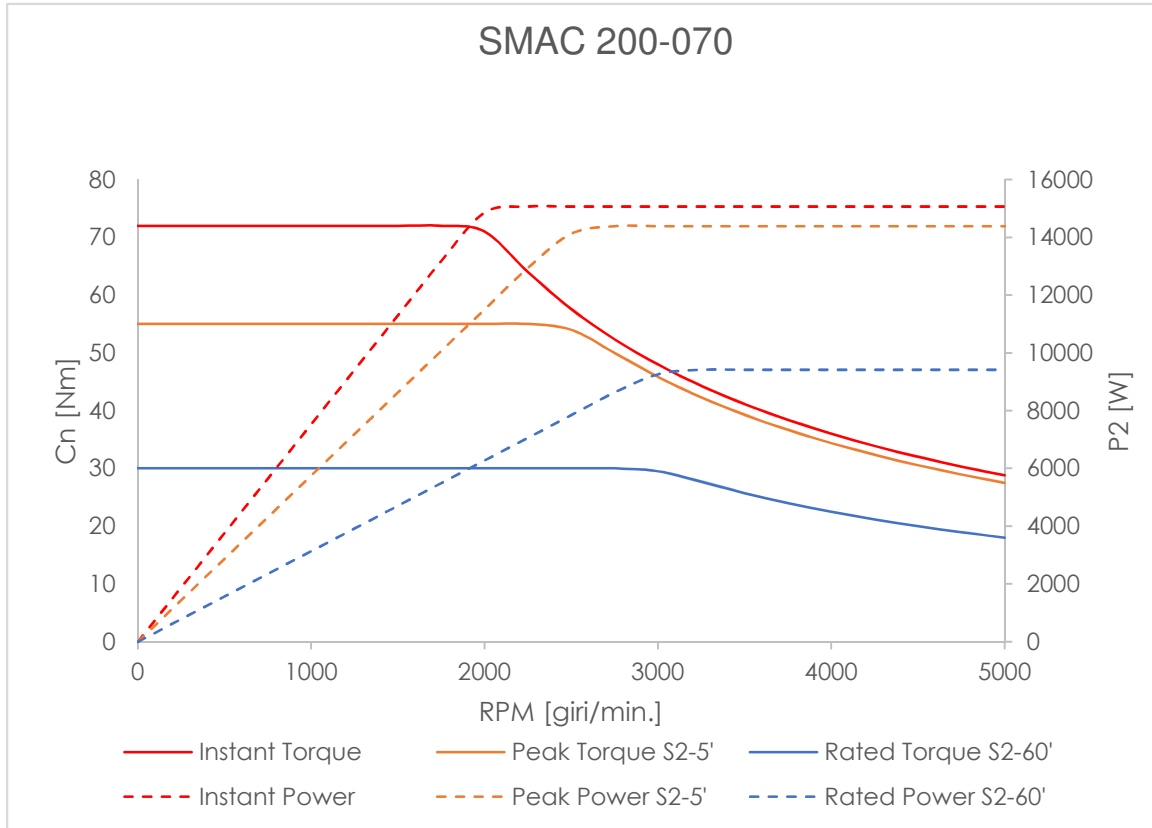

Efficiency Map

