


<b>Motor Rated Power</b>	<b>4400W</b>
--------------------------	--------------

<b>Inverter Power Supply</b>	<b>36Vdc</b>
------------------------------	--------------

Description	Symbol	Unit	
Operating Mode	-	-	S2-60min
Motor speed	$n_n$	rpm	4000
Number of poles	$2p$	-	4
Voltage	$V$	Vac	25.4
Frequency	$f_n$	Hz	137
Nominal Torque	$C_n$	Nm	10.6
Nominal Current	$I_n$	Arms	149
Efficiency	$\eta$	-	81
Protection Degree	IP		IP 54
Insulation Class	-	-	F
Connection	-	-	DELTA
Thermal Protection	-	-	KTY84-130
Speed Sensor	-	Puls/Rev	64
Brake Supply Volt	$V_B$	Vdc	-
Brake Torque	$C_B$	Nm	-
Brake Power	$P_B$	W	-

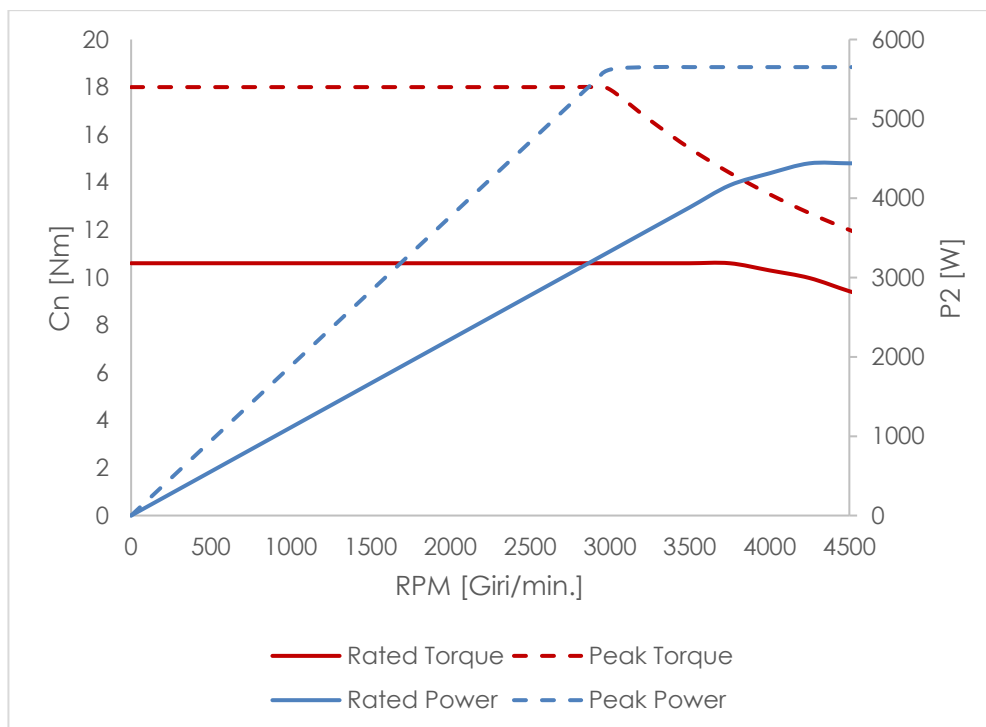

Description	Symbol	Unit	Rated Power	Max speed	Max torque
Duty			S2-60min	S2-30min	S2-5min
Rpm	$n$	rpm	4000	4500	3000
Torque	$C$	Nm	10.6	9.4	18.0
Output power	$P$	W	4400	4400	5600
Current	$I$	Arms	149	149	300
Frequency	$f$	Hz	137	152	103

**PRELIMINARY**

Questo documento è proprietà di **Benevelli S.r.l.**, non può essere usato, riprodotto o reso noto a terzi, senza autorizzazione scritta.  
This document is a **Benevelli S.r.l.** property. All rights reserved. No design, or parts of them, may transmitted in any form.